






# Master

Electrical submersible drainage pump

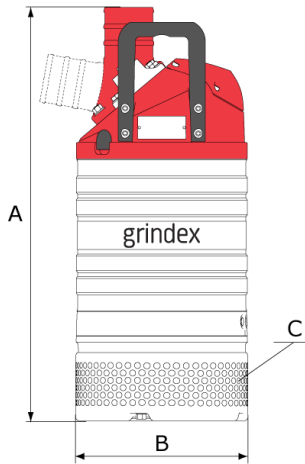

50 Hz	N	H
Discharge connection	6"	4"
Rated power $P_2$ [kW]	10	10
Max. power consumption $P_1$ [kW]	11,7	11,7
Shaft speed [r.p.m.]	2860	2860
Rated current at 230V	33 A	33 A
Rated current at 400V	19 A	19 A
Rated current at 500V	15 A	15 A
Solids passage C	12 mm	12 mm
Dimensions A / B	832 / 346 mm	832 / 346 mm
Weight	80 kg	80 kg

Other voltages on request

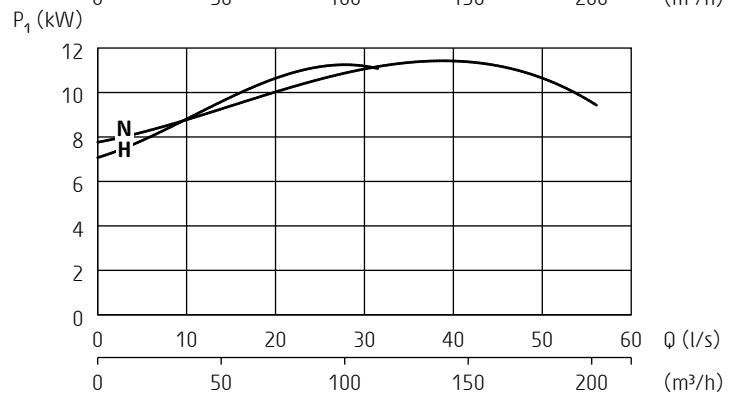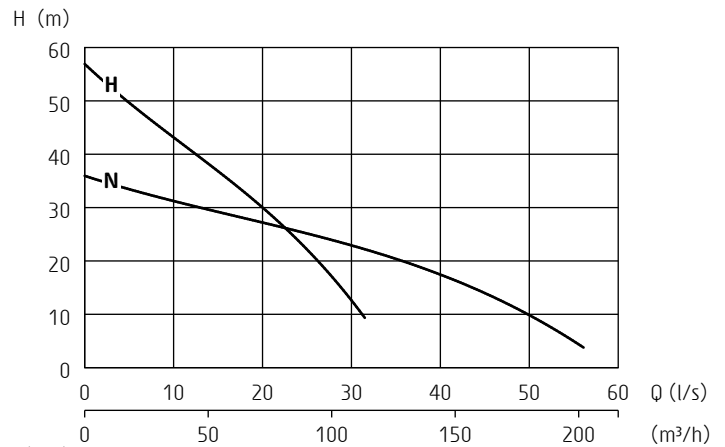

ISO 9906/A

## Pump types

N: normal pressure  
H: high pressure

## Classification

Electrical submersible drainage pump  
Protection class: IP 68

## Electrical motor

Squirrel cage induction motor, insulation class: H (IEC 85), DOL or star/delta

## Motor protection

Phase sequence control, phase failure guard, temperature guard with thermal contacts in the stator opening temperature 140°C (284°F) (= SMART system), air valve

## Cable - SubCab

230V: 4G4mm<sup>2</sup>, 20 m (66 ft) or 8AWG/4, 53 ft  
380-575V: 4G4mm<sup>2</sup>, 20 m (66 ft) or 12AWG/4, 53 ft

## Limitations

Max. submersion depth: 20 m (66 ft)  
Max. liquid temperature: 40 °C (104 °F)  
Allowed pH range: 5 - 8  
Maximum liquid density: 1100 kg/m<sup>3</sup> (68 lbs/ft<sup>3</sup>)

## Shaft seals

Cartridge seal: pre-assembled double mechanical seal running in an oil compartment

Material lower seal: *tungsten carbide - tungsten carbide*  
Material upper seal: *tungsten carbide - tungsten carbide*

## Bearings

Ball bearings with C3 clearance

## Discharge connection

4-6" hose, ISO-G or NPT

## Materials

Casted parts: *Aluminium*  
Outer casing: *Stainless steel*  
Motor shaft: *Stainless steel*  
Impeller and suction cover: *Hard-Iron™*  
Diffusers: *Nitrile rubber*  
Screws and nuts: *Stainless steel*  
O-rings: *Nitrile rubber*

## Accessories

External level regulator  
Zinc anodes  
Tandem connection

Specifications can be changed without notice